

## Models CHDSS / ZS

Designed for Maximum Dependability and Service




(Example Finished Product)


1/4 hp ball bearing fan motors provide years upon years of run time. Our unit includes heavy duty blades and OSHA approved fan guards.



Oversized individual condenser designed for high ambient summer temperatures.

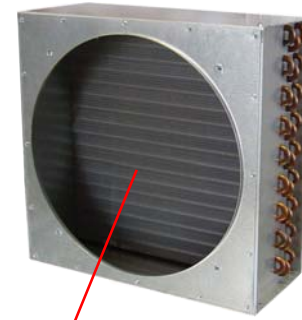

Stainless steel hail guards protect units from any type of abuse.

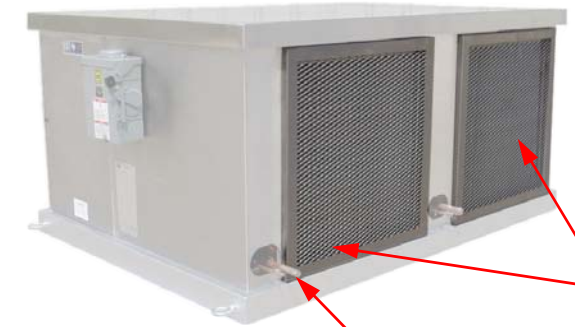


RDT provides its customers with pre-piped suction and liquid lines.



Optional Pre-Wired Fused Disconnect

RDT provides lifting eyes on all four corners of our unit.

Entire weather cover 304 brushed stainless steel. This unit is designed with no external fasteners and no unfinished corners to provide years of operation.

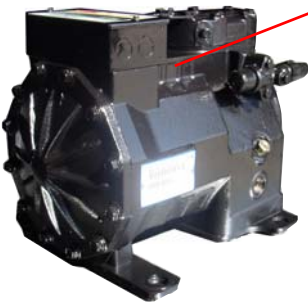

RDT utilizes the reliable Copeland® Copelametic® semi-hermetic Compressors (on the CHDSS model line).



RDT utilizes the latest technology. Copeland® Glacier™ Scroll® Compressors (on the ZS model line).

RDT's modular base design allows individual units to be exchanged as needed.

Note: CHDSS1-2 Shown


All welded sight glass and drier



Johnson Micro Set Controls with stainless steel super-hose



UL® approved stainless steel electrical enclosure

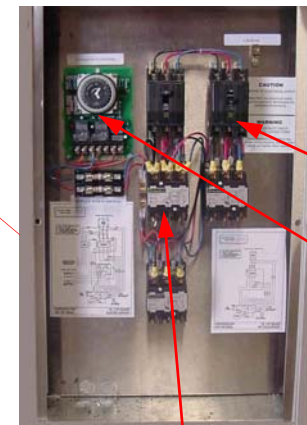

Individual Square D® Breaker for each compressor.

Solid state defrost clock eliminates mechanical gears and springs.

Defrost Contactor locks out until compressor pumps down, eliminating erroneous breaker trips.

## CHDSS / ZS Star Components